



Download


DXF 2D  
- 323\_355.dxf



### 323 Label

For version art. 616/617/618/619. Pittogrammi self-sticking visible until 27 meters

Uscita destra 995220  
Uscita sinistra 995221  
Uscita giu 995222  
Exit 995224

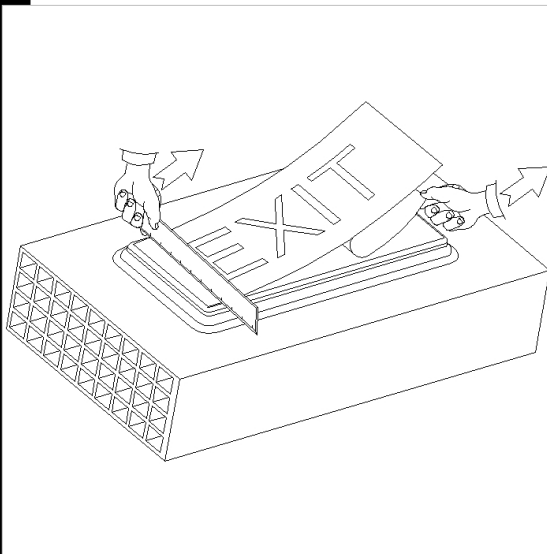

Code	Kg	WTot	Colour
995224-00	0.10	0 W	GREEN
995222-00	0.10	0 W	GREEN
995221-00	0.10	0 W	GREEN
995220-00	0.10	0 W	GREEN

#### Products



- 614 Safety permanent 1 hr



- 615 Safety only 1hr maintained



- 616 Safety 1h S.E.



- 617 Safety 1h S.A.



- 618 Safety 3h S.E.



- 619 Safety 3h S.A.

The reported luminous flux is the flux emitted by the light source with a tolerance of  $\pm 10\%$  compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated